

准共振电源IC **MS1003SH**

评估用电源


Input voltage: AC 90 ~ 276V

Output	Voltage [V]	Output Current [A]		
		min	typ	max
1	+24	0.0	3.0	3.0
Total Power [W]		0.0	72.0	72.0

关于使用本资料的说明

1. 本资料所包含的技术信息记述有我公司产品的规格、外形尺寸图、典型动作、元器件选择以及参考电路使用上的注意事项等内容。
2. 本资料中例举的参考电源是为了让大家充分了解我们产品的性能，不保证输出特性、温度特性或其他各种特性，也不保证官方机构规定的特性或安全性。
3. 我们在本资料中记载的产品是用于一般电子设备和一般工业用途的半导体元件。
请根据整机产品的重要程度确保元件在使用上的安全性和可靠性。
如果您有任何疑问，请咨询我公司的销售部门。
4. 需要极高可靠性和安全性的用途（如核电控制、航空航天、交通设备、与维持生命有关的医疗设备、燃烧控制设备和各种安全装置等），有必要使用特殊的高可靠性的元件，并考虑到故障保险等进行安全设计来确保安全。
如果您有任何疑问，请咨询我公司的销售部门。
5. 本公司对因本资料所记载的信息或其使用而造成的任何损害或侵犯专利或其他权利的行为不承担任何责任。
6. 本资料并非对本公司或任何第三方的任何知识产权或其他权利的保证或实施进行许可。
7. 如采用本资料所记载的我公司产品的整机属于「外汇和出口贸易管制法」所规定的战略物资类别，则出口时需要获得上述法律规定的出口许可。
8. 本资料中记载的我公司产品的规格和尺寸等如因改善特性有所变更，恕不另行通知。
订购时，请根据必要与我公司的销售部门联系，获取个别产品的最新规格书。
9. 未经我公司许可，严禁转载或复制本资料的全部或部分内容。

Reference circuit diagram

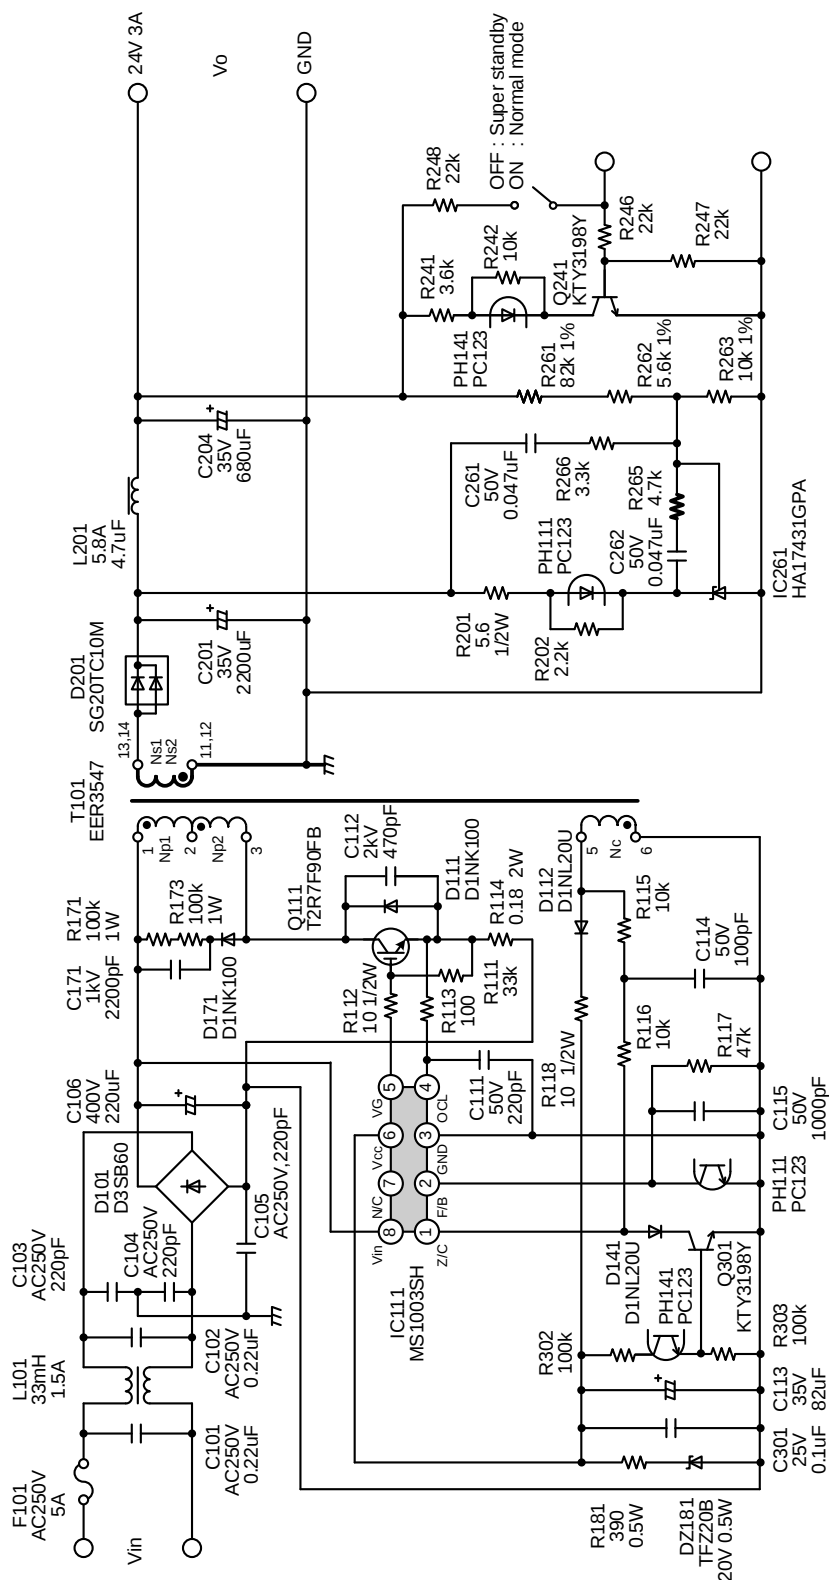

Bill Of Material

No.	Type	Qt'y	Spec		Model Name	Vendor	Remarks
F101	Fuse	1	AC250V	5A	-	-	-
L101	Line Filter	1	33mH	1.5A	-	-	-
L201	Choke Coil	1	4.7uH	5.8A	-	-	-
T101	Transformer	1	-	-	EER3547	SUMIDA	-
IC111	Control IC	1	-	-	MS1003SH	SHINDENGEN	-
PH111	Opto Coupler	1	-	-	PC123FY2J00F	SHARP	-
PH141	Opto Coupler	1	-	-	PC123FY2J00F	SHARP	-
IC261	Shunt Regulator	1	-	-	HA17431GPA	RENESAS	-
Q111	IGBT	1	900V	2.7A	T2R7F90B	SHINDENGEN	-
Q241	Transistor	1	50V	0.15A	KTC3198Y	KEC	-
Q301	Transistor	1	50V	0.15A	KTC3198Y	KEC	-
D101	Bridge Diode	1	600V	4A	D3SB60	SHINDENGEN	-
D111	FRD	1	1000V	1A	D1NK100	SHINDENGEN	-
D112	FRD	1	200V	1A	D1NL20U	SHINDENGEN	-
D141	FRD	1	200V	1A	D1NL20U	SHINDENGEN	-
D171	FRD	1	1000V	1A	D1NK100	SHINDENGEN	-
D201	SBD	1	100V	20A	SG20TC10M	SHINDENGEN	-
DZ181	Zenor diode	1	20V	0.5W	TFZ20B	ROHM	-
C101	Film Capacitor	1	AC250V	0.22uF	LE224	OKAYA	-
C102	Film Capacitor	1	AC250V	0.22uF	LE224	OKAYA	-
C103	Ceramic Capacitor	1	AC250V	220pF	-	TDK	-
C104	Ceramic Capacitor	1	AC250V	220pF	-	TDK	-
C105	Ceramic Capacitor	1	AC250V	220pF	-	TDK	-
C106	Electrolytic Capacitor	1	400V	220uF	-	Rubycon	-
C111	Film Capacitor	1	50V	220pF	-	-	-
C112	Ceramic Capacitor	1	2kV	470pF	CC45SL3AD101JYNNA	TDK	-
C113	Electrolytic Capacitor	1	35V	82uF	-	Rubycon	-
C114	Film Capacitor	1	50V	100pF	-	-	-
C115	Film Capacitor	1	50V	1000pF	-	-	-
C171	Ceramic Capacitor	1	1kV	2200pF	-	TDK	-
C201	Electrolytic Capacitor	1	35V	2200uF	-	Rubycon	-
C204	Electrolytic Capacitor	1	35V	680uF	-	Rubycon	-
C261	Film Capacitor	1	50V	0.047uF	-	-	-
C262	Film Capacitor	1	50V	0.047uF	-	-	-
C301	Film Capacitor	1	50V	0.1uF	-	-	-
R111	Carbon Resistor	1	1/4W	33kΩ	-	-	-
R112	Carbon Resistor	1	1/2W	10Ω	-	-	-
R113	Carbon Resistor	1	1/4W	100Ω	-	-	-
R114	Metal Plate Resistor	1	2W	0.18Ω	-	-	-
R115	Carbon Resistor	1	1/4W	10kΩ	-	-	-
R116	Carbon Resistor	1	1/4W	10kΩ	-	-	-
R117	Carbon Resistor	1	1/4W	47kΩ	-	-	-
R118	Carbon Resistor	1	1/2W	10Ω	-	-	-
R171	Metal Oxide Film Resistor	1	1W	100kΩ	-	-	-
R173	Metal Oxide Film Resistor	1	1W	100kΩ	-	-	-
R181	Carbon Resistor	1	1/2W	390Ω	-	-	-

Bill Of Material

No.	Type	Qt'y	Spec	Model Name	Vendor	Remarks
R201	Carbon Resistor	1	1/2W 5.6kΩ	-	-	-
R202	Carbon Resistor	1	1/4W 2.2kΩ	-	-	-
R241	Carbon Resistor	1	1/4W 3.6kΩ	-	-	-
R242	Carbon Resistor	1	1/4W 10kΩ	-	-	-
R246	Carbon Resistor	1	1/4W 22kΩ	-	-	-
R247	Carbon Resistor	1	1/4W 22kΩ	-	-	-
R248	Carbon Resistor	1	1/4W 22kΩ	-	-	-
R261	Metal Film Resistor	1	1/4W 82kΩ	-	-	1%
R262	Metal Film Resistor	1	1/4W 5.6kΩ	-	-	1%
R263	Metal Film Resistor	1	1/4W 10kΩ	-	-	1%
R265	Carbon Resistor	1	1/4W 4.7kΩ	-	-	-
R266	Carbon Resistor	1	1/4W 3.3kΩ	-	-	-
R302	Carbon Resistor	1	1/4W 100kΩ	-	-	-
R303	Carbon Resistor	1	1/4W 100kΩ	-	-	-
HS101	Heat Sink	1	- 8.9K/W	BPUE46-30	MIZUDEN	-
HS201	Heat Sink	1	- 11.4K/W	BPUE36-25	MIZUDEN	-

QRC Transformer


Vin= AC90~276V fmin= 36kHz
Po= 74.4W

Inductandce (Np) 1-3pin 0.59mH


Core
EER3547 Material : PC40 Manufacturer : SUMIDA

Bobbin
EER3547 Pin Number : 14 Manufacturer : SUMIDA

< Pin assignment >

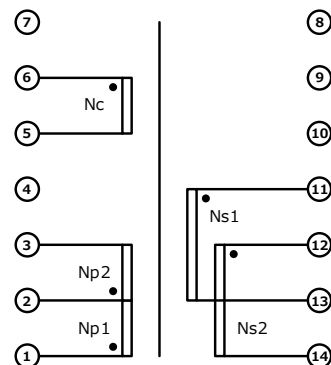

< Structure drawing >





< Winding Specifications >

Winding Order	Current Name	Pin Number		Turn [T]	diameter [mm dia]	Material	Output		Notes
		Start	End				Voltage	Current	
1	Np1	2	3	31	0.45×2	1UEW	-	-	Aligned Winding
2	Ns1	11	13	7	0.45×4	1UEW	24V	3.00 A	Aligned Winding
3	Ns2	12	14	7	0.45×4	1UEW			Aligned Winding
4	Np2	1	2	26	0.45×2	1UEW			Aligned Winding
5	Nc	6	5	6	0.23	1UEW	16V	-	Aligned Winding

Efficiency

Vin [V]	Pin [W]	Po [W]	η [%]	24V Vo [V]	24V Io [A]	f [kHz]	mode
AC100	86.7	72.90	84.11	24.3	3.0	50.5	Quasi resonant
	57.2	48.7	85.10	24.3	2.0	66.3	Quasi resonant
	42.6	36.5	85.70	24.4	1.5	90.2	Quasi resonant
	38.5	32.9	85.36	24.4	1.4	96.0	Quasi resonant
	28.7	24.4	85.01	24.4	1.0	112.2	Quasi resonant
	22.7	19.0	84.04	24.4	0.8	129.4	Quasi resonant
	22.6	19.1	84.50	24.4	0.8	78.0	Bottom skip
	17.6	14.7	83.48	24.4	0.6	84.6	Bottom skip
	14.7	12.2	83.20	24.5	0.5	89.4	Bottom skip
	9.1	7.3	80.47	24.5	0.3	101.5	Bottom skip
	6.4	4.9	76.73	24.5	0.2	109.9	Bottom skip
	5.3	3.9	74.69	24.5	0.2	111.1	Bottom skip
	3.2	2.0	60.54	24.5	0.1	123.6	Bottom skip
	3.2	2.0	60.54	24.5	0.1	123.6	Burst mode
	0.6	0.2	40.88	24.5	0.0	112.2	Burst mode
	2.8	2.0	70.30	24.5	0.1	112.2	Burst mode
	5.3	3.9	74.24	24.5	0.2	112.2	Burst mode
	6.3	4.9	77.35	24.5	0.2	110.0	Bottom skip
	9.2	7.3	80.24	24.5	0.3	100.0	Bottom skip
	28.8	24.4	84.90	24.4	1.0	71.5	Bottom skip
AC230	38.7	32.9	85.07	24.4	1.4	61.8	Bottom skip
	38.5	32.9	85.38	24.4	1.4	96.0	Quasi resonant
	83.0	72.67	87.57	24.2	3.0	101.9	Quasi resonant
	54.6	47.3	86.65	24.3	2.0	132.5	Quasi resonant
	54.6	47.4	86.84	24.3	2.0	78.6	Bottom skip
	42.3	36.5	86.39	24.4	1.5	85.3	Bottom skip
	34.3	29.3	85.26	24.4	1.2	91.7	Bottom skip
	28.5	24.4	85.51	24.4	1.0	96.5	Bottom skip
	8.1	6.1	76.07	24.5	0.3	125.0	Bottom skip
	8.1	6.1	76.07	24.5	0.3	118.3	Burst mode
	6.6	4.9	73.91	24.5	0.2	118.3	Burst mode
	5.0	3.7	73.96	24.5	0.2	118.3	Burst mode
	3.6	2.5	68.09	24.5	0.1	118.3	Burst mode
	5.0	3.7	73.46	24.5	0.2	118.3	Burst mode
	6.6	4.9	74.70	24.5	0.2	120.2	Burst mode
	8.1	6.1	75.60	24.5	0.3	118.3	Burst mode
	11.7	9.1	77.38	24.5	0.4	118.3	Burst mode
	34.1	29.3	85.73	24.4	1.2	92.4	Bottom skip
	42.2	36.5	86.48	24.4	1.5	85.9	Bottom skip
	54.5	47.4	87.12	24.3	2.0	78.6	Bottom skip
	83.3	72.8	87.39	24.3	3.0	65.1	Bottom skip

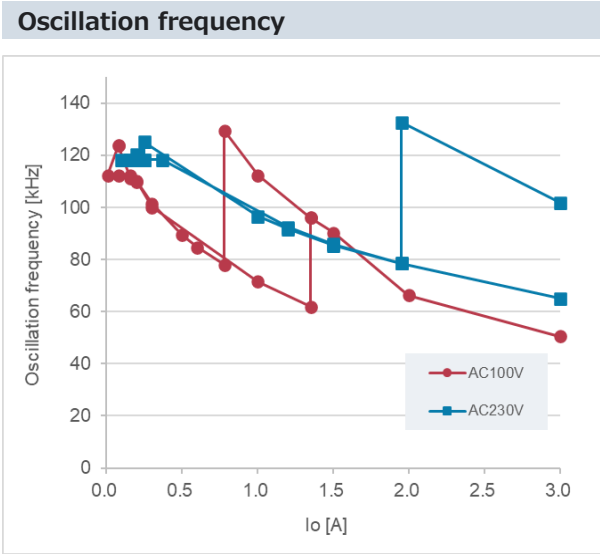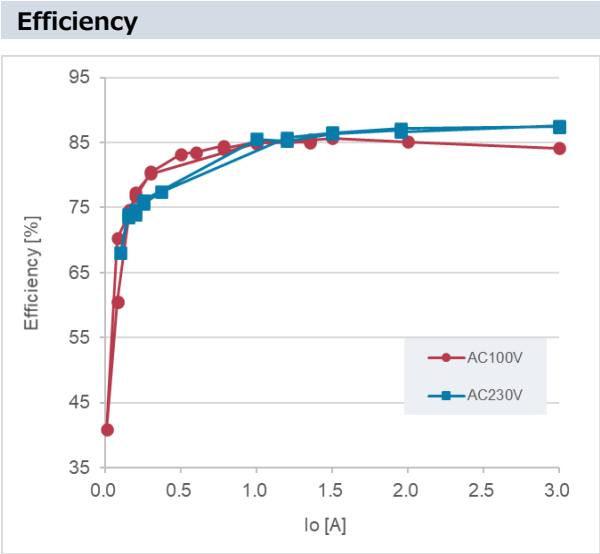

Standby power


Super standby mode

Vin [V]	Pin [mW]	Po [mW]	η [%]	24V Vo [V]	24V Io [mA]
AC100	53.00	0.00	0.00	24.5	0.0
	76.00	36.20	47.63	18.1	2.0
	99.60	62.52	62.77	15.6	4.0
	122.60	85.80	69.98	14.3	6.0
	152.00	108.80	71.58	13.6	8.0
	179.20	132.60	74.00	13.3	10.0
AC230	83.50	0.00	0.00	24.5	0.0
	111.60	41.19	36.91	20.6	2.0
	131.80	68.84	52.23	17.2	4.0
	159.60	92.94	58.23	15.5	6.0
	191.00	116.80	61.15	14.6	8.0
	217.40	139.20	64.03	13.9	10.0


Normal mode

Vin [V]	Pin [mW]	Po [mW]	η [%]	24V Vo [V]	24V Io [mA]
AC100	299.50	0.00	0.00	24.5	0.0
	357.00	49.05	13.74	24.5	2.0
	428.00	98.10	22.92	24.5	4.0
	478.00	147.16	30.79	24.5	6.0
	543.00	196.20	36.13	24.5	8.0
	601.00	245.25	40.81	24.5	10.0
AC230	314.90	0.00	0.00	24.5	0.0
	371.00	49.05	13.22	24.5	2.0
	434.40	98.10	22.58	24.5	4.0
	493.00	147.15	29.85	24.5	6.0
	552.00	196.20	35.54	24.5	8.0
	616.00	245.25	39.81	24.5	10.0

Efficiency

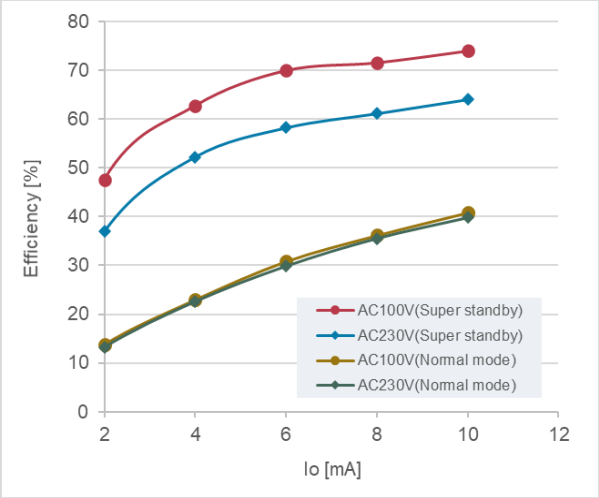

Standby power

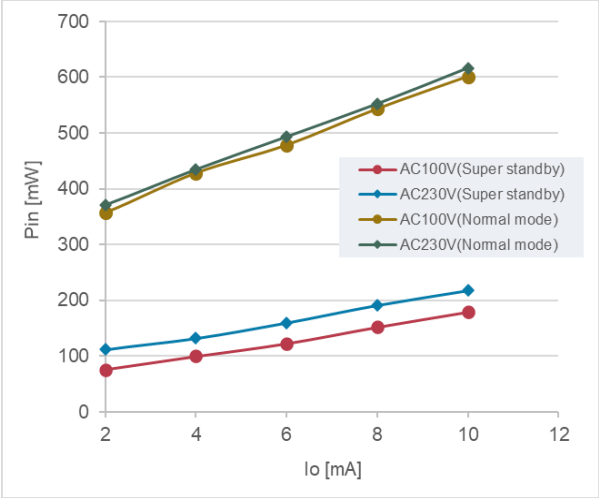


Operation waveform

Photo.1 Maximum load waveform

$I_o=3A$

CH1 : MOSFET V_{DS} 200V/div
CH2 : MOSFET I_D 2A/div
CH3 : V_{CC} terminal voltage 10V/div
Time : 10us/div

AC100V Maximum load

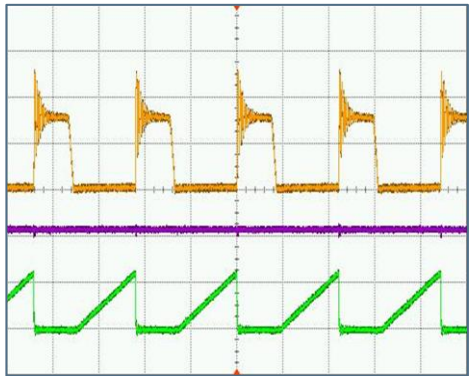

AC230V Maximum load


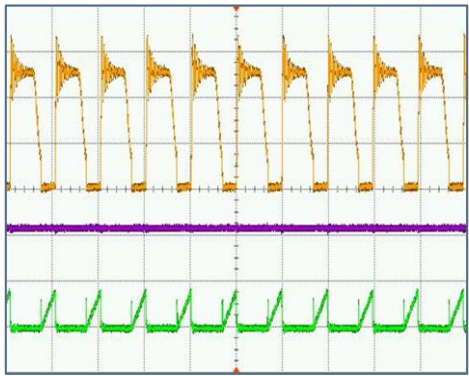


Photo.2 Minimum load waveform


$I_o=0.02A$

CH1 : MOSFET V_{DS} 200V/div
CH2 : MOSFET I_D 2A/div
CH3 : V_{CC} terminal voltage 10V/div

AC100V Minimum load

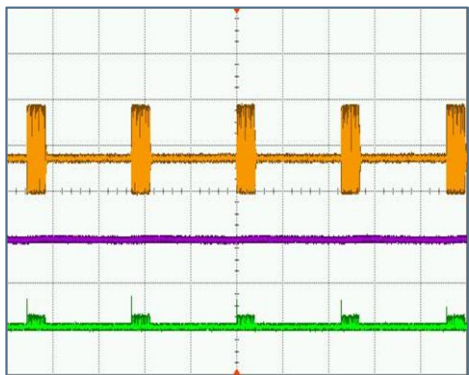


Zoom ↓

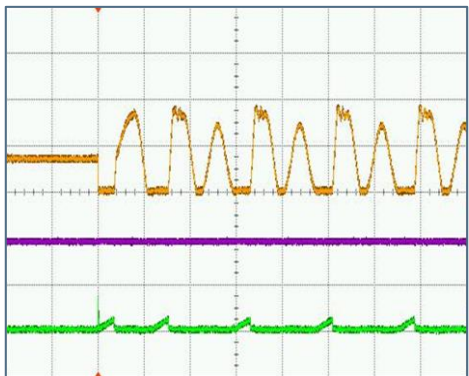


5us/div

AC230V Minimum load

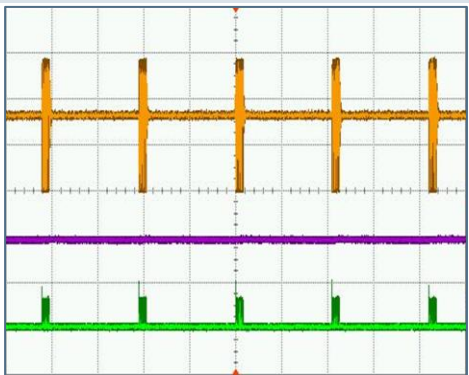

Zoom ↓

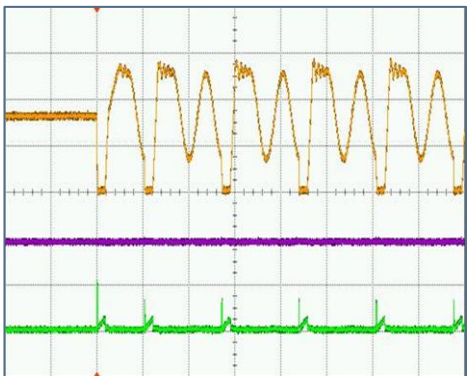

5us/div


Operation waveform

Photo.3 Bottom skip waveform

$I_o=1A$

CH1 : MOSFET V_{DS} 200V/div
CH2 : MOSFET I_D 2A/div
CH3 : V_{CC} terminal voltage 10V/div
Time : 5 μ s/div

AC100V Bottom skip

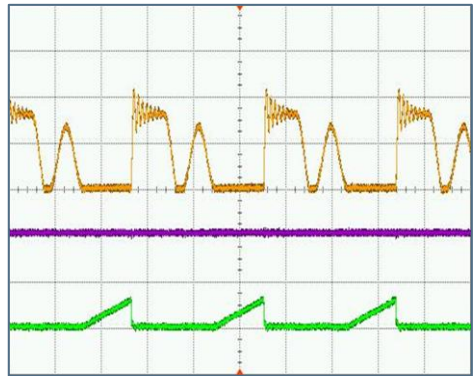

CH1 GND

CH2 GND
CH3 GND

AC230V Bottom skip


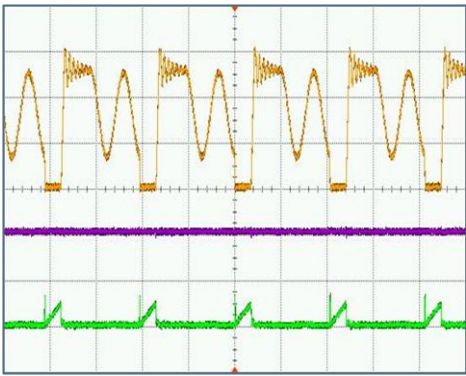


Photo.4 No load waveform

$I_o=0A$

CH1 : MOSFET V_{DS} 200V/div
CH2 : MOSFET I_D 2A/div
CH3 : V_{CC} terminal voltage 10V/div
Time : 50ms/div


AC100V Minimum load

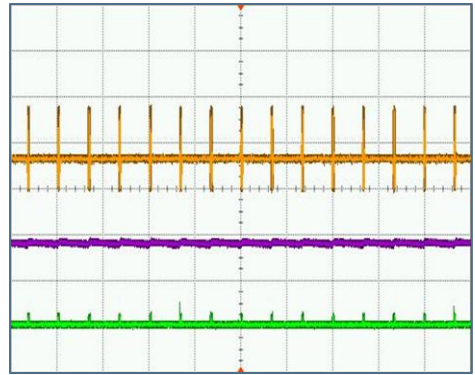

CH1 GND

CH2 GND
CH3 GND

AC230V Minimum load

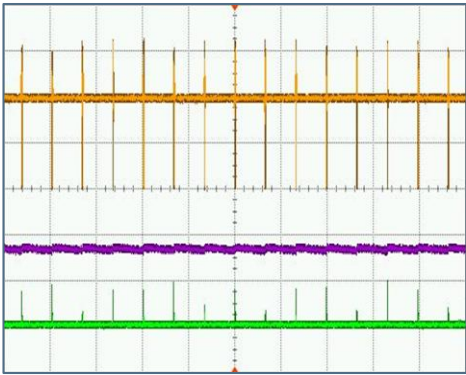

Temperature

Maximum load temperature

24V/3A

Vin(AC) [V]	Bridge diode D101 ΔT [deg]	MOSFET Q111 ΔT [deg]	transformer Core ΔT [deg]	transformer Wire ΔT [deg]	Rectifier diode D201 ΔT [deg]	Control IC MS1003SH ΔT [deg]	Ambient temperature ΔT [deg]
90	37.0	41.2	28.8	28.8	25.9	15.8	32.6
100	31.5	36.2	27.2	26.9	26.3	11.3	32.9
230	13.5	27.9	29.5	28.6	25.8	11.6	32.1
276	11.9	34.9	30.2	29.5	25.7	13.3	31.9

Before bottom skip

24V/2.3A

Oscillation frequency : 131kHz

Vin(AC) [V]	MOSFET Q111 ΔT [deg]	Ambient temperature ΔT [deg]
276	33.0	31.8

Before bottom skip

24V/0.34A

Oscillation frequency : 122kHz

Vin(AC) [V]	MOSFET Q111 ΔT [deg]	Ambient temperature ΔT [deg]
276	19.5	31.8